




Dimensions

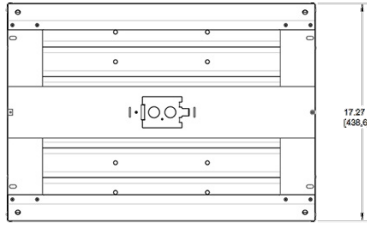

Features

- High efficiency. Low price.
- Rated for high ambient environments up to 55° C
- Available with factory-installed Lightcloud controls
- Ideal for industrial warehouse spaces
- 50,000 hour LED lifespan
- 5-year limited warranty

Ordering Matrix

Family	Length	Wattage	Color Temp	Voltage	Control Options	Battery Backup	Cord & Plug
ARBAY	2	125		/480			/8C
	2 = 2 ft.	90 = 90W	Blank = 5000K (Cool)	Blank = 120-277V	Blank = No Control Option	Blank = No Battery Backup	Blank = No cord and plug
	4 = 4 ft/	125 = 125W	N = 4000K (Neutral)	/480 = 480V	/LCS = LCHBSENSE w/ mounting arm (120V - 277V)	/E2 = Battery Backup (120V - 277V)	/8C = 8 ft. cord, no plug
		175 = 175W			/LOS = LOSBAY800 w/ mounting arm (480V not available)		/8CP = 8 ft. cord & straight plug, 120V
		260 = 260W			/LC = Lightcloud (120V - 277V)		/8CP2 = 8 ft. cord & straight plug, 277V
							/8CPT2 = 8 ft. cord & twistlock, 277V
							/8CPT4 = 8 ft. cord & twistlock, 480V