



LED bollard with architectural quality and strength at an affordable price point. Cylindrical post with dome head. Available in 4 light pattern configurations including 360° (24W), 270°(18W), 180°(12W option) & 90°(12W standard).

Color: Bronze

Weight: 10.4 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|--------------|------------------|-----------------|---------|
| Type: | Constant Current | Watts: | 18W |
| 120V: | 0.24A | Color Temp: | 4000K |
| 208V: | 0.18A | Color Accuracy: | 72 CRI |
| 240V: | 0.15A | L70 Lifespan: | 100000 |
| 277V: | 0.12A | Lumens: | 1888 |
| Input Watts: | 17W | Efficacy: | 109 LPW |
| Efficiency: | N/A | | |

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for mounting within 4 ft. (1.2m) of the ground.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.
DLC Product Code: P3DVRQJ3

IESNA LM-79 & IESNA LM-80 Testing:

RAB LED fixtures have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

LED Characteristics

LEDs:

Long-life, high-efficiency, surface mount LEDs.

Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Color Consistency:

5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017

Electrical

Driver:

Constant Current, Class 2, 100-277V, 50/60 Hz, 4kV Surge Protection, 700mA, 120V: 0.24A, 208V: 0.18A, 240V: 0.15A, 277V: 0.12A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

THD:

6.5% at 120V, 10.4% at 277V

Power Factor:

99.5% at 120V, 89.7% at 277V

Optical

BUG Rating:

B1 U3 G2

Construction

Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

Thermal Management:

Cast aluminum Thermal Management system for optimal heat sinking. The BDLED is designed for cool operation, maximum efficiency and long life by minimizing LED junction temperature.

Housing:

Die-cast aluminum with extruded aluminum post

Lens:

Frosted vandal resistant polycarbonate

Reflector:

Vacuum metalized polycarbonate

Mounting:

Four (4) anchor bolts provided for concrete pad mounting. Internal base support has leveling screws.

Gaskets:

High-temperature silicone gaskets seal out moisture gaskets seal out moisture

Anchor Bolt:

Anchor Bolt Dimension is available .

Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color.

Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

Other

Patents:

The design of BLED is protected by patents in US, Canada & China.

Replacement:

Replaces up to 50W Metal Halide.

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.


Technical Specifications (continued)

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

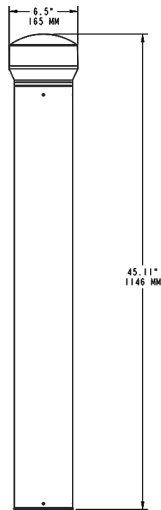

Features

- Patented base mount design for super sturdy installation
- Durable construction and frosted vandal-resistant polycarbonate lens
- Precision-engineered optics deliver maximum downward lighting without glare
- Four leveling screws provided for easy installation
- 100,000-hour LED lifespan

Ordering Matrix

| Family | Wattage | Color Temp | Finish | Distribution | Voltage | Dimming | Backup |
|--------|-----------------------|----------------------|----------------|---|------------------------------|-------------------------|--|
| BDLEDR | 18 | N | | | | /D10 | |
| | 24 = 24W 360° Pattern | Blank = 5000K (Cool) | Blank = Bronze | Blank = Standard 180 = 180 degrees (12W only) | Blank = No Option (120-277V) | Blank = None (Standard) | Blank = No Battery Backup |
| | 18 = 18W 270° Pattern | N = 4000K (Neutral) | W = White | | /480 = 480V (24W only) | /D10 = 0-10V Dimming | /E = Battery Backup (24W only) |
| | 12 = 12W | Y = 3000K (Warm) | | | | | /EC = Battery Backup Cold Weather (24W only) |