



1-2 Lamp and 3-4 Lamp drivers available for 2FT and 4FT linear applications  
 Color: White Weight: 0.4 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Watts	15.00W	Input Voltage	Ballast Dependent
Color Temp	N/A	Power Factor	Ballast Dependent
Lumens	2,200	Flicker	N/A
Efficacy	146.7 LPW	THDi	N/A
Color Accuracy	N/A	R9	
L70 Accuracy	50,000		

## Technical Specifications

### Technical Specifications

**Product Type:**

Driver

**Bulb Shape:**

3FT/4FT 2 Lamp

**L70 Lifespan:**

50,000 hours

**Warranty:**

5-Year, No-Compromise Warranty

**Installation Type:**

Driver for Type C tubes

**For Use in Emergency Fixtures:**

No

**For Use Outdoors in Open Fixtures:**

No

**Electrical Characteristics**

**Power Factor:**

>0.9

**THDi:**

<20%

**Listings**

**UL Listed:**

Yes


**CEC Status:**

Lawful for sale in California

**DLC Listed:**

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PXYTNBV9

## Dimensions

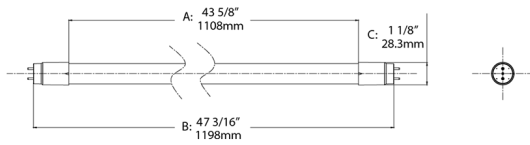

## Features

**FLUORESCENT REPLACEMENT** - Replace conventional fluorescent T8 linear tubes

**TYPE C TUBES** - Operates with an external driver

**50,000-HOUR LIFESPAN** - Lasts 1.6x longer than conventional fluorescent tubes

**DIMMABLE** - Compatible with 0-10V dimming systems for higher efficiency

**ENCLOSED FIXTURE RATED** - May be used in enclosed and open fixtures

**DIFFUSION COATING** - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle

**INSTANT ON** - No warmup time required, full brightness instantly

**SAVE ENERGY AND MONEY** - Approximately 40% more efficient than conventional T8 lamps

**SHUNTED AND NON-SHUNTED** - Works on shunted and non-shunted sockets

**MERCURY FREE** - Environmentally friendly vs fluorescent technologies

**SINGLE OR DOUBLE-ENDED WIRING** - Can be wired using either single-ended or double-ended method