



1-2 Lamp and 3-4 Lamp drivers available for 2FT and 4FT linear applications
 Color: White Weight: 0.4 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Watts	15.00W	Input Voltage	Ballast Dependent
Color Temp	N/A	Power Factor	Ballast Dependent
Lumens	2,200	Flicker	N/A
Efficacy	146.7 LPW	THDi	N/A
Color Accuracy	N/A	R9	
L70 Accuracy	50,000		

Technical Specifications

Technical Specifications

Product Type:

Driver

Bulb Shape:

3FT/4FT 4 Lamp

L70 Lifespan:

50,000 hours

Warranty:

5-Year, No-Compromise Warranty

Installation Type:

Driver for Type C tubes

For Use in Emergency Fixtures:

No

For Use Outdoors in Open Fixtures:

No

Electrical Characteristics

Power Factor:

>0.9

THDi:

<20%

Listings

UL Listed:

Yes


CEC Status:

Lawful for sale in California

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: P46HV71K

Dimensions

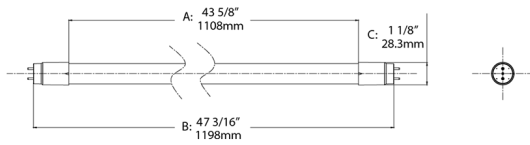

Features

FLUORESCENT REPLACEMENT - Replace conventional fluorescent T8 linear tubes

TYPE C TUBES - Operates with an external driver

50,000-HOUR LIFESPAN - Lasts 1.6x longer than conventional fluorescent tubes

DIMMABLE - Compatible with 0-10V dimming systems for higher efficiency

ENCLOSED FIXTURE RATED - May be used in enclosed and open fixtures

DIFFUSION COATING - Will maintain the same light quality over time and won't yellow, shrink, or wrinkle

INSTANT ON - No warmup time required, full brightness instantly

SAVE ENERGY AND MONEY - Approximately 40% more efficient than conventional T8 lamps

SHUNTED AND NON-SHUNTED - Works on shunted and non-shunted sockets

MERCURY FREE - Environmentally friendly vs fluorescent technologies

SINGLE OR DOUBLE-ENDED WIRING - Can be wired using either single-ended or double-ended method