



Color: Copper

Weight: 0.5 lbs

|                     |              |
|---------------------|--------------|
| <b>Project:</b>     | <b>Type:</b> |
| <b>Prepared By:</b> | <b>Date:</b> |

| Driver Info |                  | LED Info       |              |
|-------------|------------------|----------------|--------------|
| Type        | Constant Current | Watts          | 16W          |
| 120V        | 0.17A            | Color Temp     | 3000K        |
| 208V        | N/A              | Color Accuracy | 90 CRI       |
| 240V        | N/A              | L70 Lifespan   | 50,000 Hours |
| 277V        | N/A              | Lumens         | 1,000        |
| Input Watts | 16W              | Efficacy       | 62.5         |

### Technical Specifications

#### Performance

##### Description:

The DISK34 is an ultra low profile surface-mount, ideal solution for new construction and retrofit applications. IC rated for direct contact with insulation, air tight, suitable for indoor applications in dry and damp environments. Mounting kit for recessed housing sold separately.

##### Product Type:

Surface & Flush Mounts

##### Input Wattage:

16W

##### Lumens (Nominal):

1000lm

##### Efficacy:

62.5 lm/W

##### L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

##### R9 Value:

High color performance with R9 greater than 50

#### Compliance

##### UL Listed:

Suitable for damp locations

##### UL Classified:

Yes

##### ENERGY STAR V2.2:

This product is ENERGY STAR® Version 2.2 Certified.

##### Energy Star ID:

2387953

##### Fixture Rating:

Open

##### IC Rated:

Suitable for direct contact with insulation

#### Electrical

##### Dimming Driver:

TRIAC compatible dimmer with dimming as low as 5%

Technical Specifications (continued)

**Electrical**

**Power Factor:**

0.9

**Flicker:**

<30%

**Input Voltage:**

120V

**Operating Frequency:**

60Hz

**Construction**

**Material:**

Aluminum

**Trim Style:**

Smooth Trim

**Shape:**

Round

**Mounting:**

Surface mount

**Operating Temperature:**

-30°C (-22°F) to 40°C (104°F)

**Optical**

**Beam Angle:**

110°

**Other**


**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

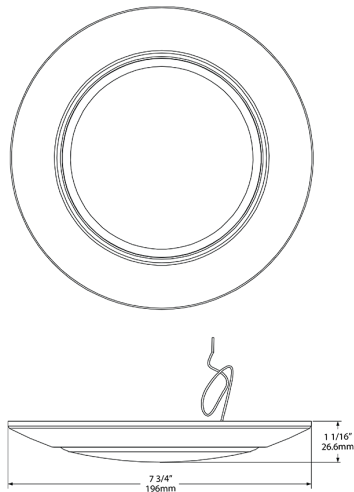

Features

- Super low profile backlit LED with driverless design
- Stamped aluminum housing
- New construction or retrofit applications
- Simple and quick installation from below the ceiling
- Installs on standard 4" and 6" junction boxes
- Can be retrofitted to existing downlight housings with option accessory
- Suitable for Damp locations
- Dimmable down to 5% on compatible dimmers
- 5-Year, Limited Warranty

## Ordering Matrix

| Family | Size             | Shape     | Wattage  | CRI/Color Temp  | Voltage    | Finish   | Trim       |   |
|--------|------------------|-----------|--|---|------------|--|------------|---|
| DSK34  | -                | 6         | R  | 16  | 930        | 120  | BR         | S |
|        | 4 = 4"<br>6 = 6" | R = Round | 12 = 12W<br>14 = 14W<br>16 = 16W<br>16.5 = 16.5W | 950 = 90 CRI, 5000K<br>940 = 90 CRI, 4000K<br>935 = 90 CRI, 3500K<br>930 = 90 CRI, 3000K<br>927 = 90 CRI, 2700K | 120 = 120V | W = White<br>B = Black<br>BR = Bronze<br>BN = Brushed Nickel | S = Smooth |   |