

product

Rectangular shaped LED floodlight with patent pending airflow fins to keep it running cool. Suggested application: building facades, signage, landscapes.

Color: White

Weight: 40.8 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

**Driver Info**

Type: Constant Current  
 120V: N/A  
 208V: N/A  
 240V: N/A  
 277V: N/A  
 Input Watts: 186W  
 Efficiency: 97%

**LED Info**

Watts: 180W  
 Color Temp: 3000K  
 Color Accuracy: 72 CRI  
 L70 Lifespan: 100000  
 Lumens: 27322  
 Efficacy: 147 LPW

## Technical Specifications

### Listings

**UL Listing:**

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

**DLC Listed:**

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities.  
 DLC Product Code: PPCV2Z43

### Electrical

**Driver:**

Constant Current, Class 1, 480V, 50/60 Hz, 480V: 0.41A

**Dimming Driver:**

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims as low as 10%.

**THD:**

11.3% at 480V

**Power Factor:**

94.4% at 480V

**Photocell:**

480V twistlock photocell Included. Photocell is only compatible with 480V.

**Surge Protection:**

4kV

### LED Characteristics

**LEDs:**

Multi-chip, high-output, long-life LEDs

**Lifespan:**

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

**Color Stability:**

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

**Color Uniformity:**

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

### Construction

**IP Rating:**

Ingress Protection rating of IP66 for dust and water

**Cold Weather Starting:**

Minimum starting temperature is -40°C (-40°F)

**Ambient Temperature:**

Suitable for use in 40°C (104°F) ambient temperatures.

**Thermal Management Housing:**

Superior heat sinking with external Air-Flow fins.

**Housing:**

Die-cast aluminum housing, lens frame and mounting arm.

**Mounting:**

Heavy-duty Slipfitter for 2 3/8"OD pipe.

**Lens:**

Clear glass lens

**Reflector:**

Specular vacuum metalized polycarbonate

**Effective Projected Area:**

EPA = 2.1

**Gaskets:**

High-temperature silicone gaskets

**Finish:**

Formulated for high-durability and long lasting color.

**Green Technology:**

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

### Optical

**NEMA Type:**

NEMA Beam Spread of 7H x 6V

## Technical Specifications (continued)

### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.


#### Patents:

The FFLED design is protected by U.S. Pat. D643,147, Canada Pat. 140798, China Pat. ZL201130171304.1, Mexico Pat. 36757 and pending patent in Taiwan.

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Dimensions

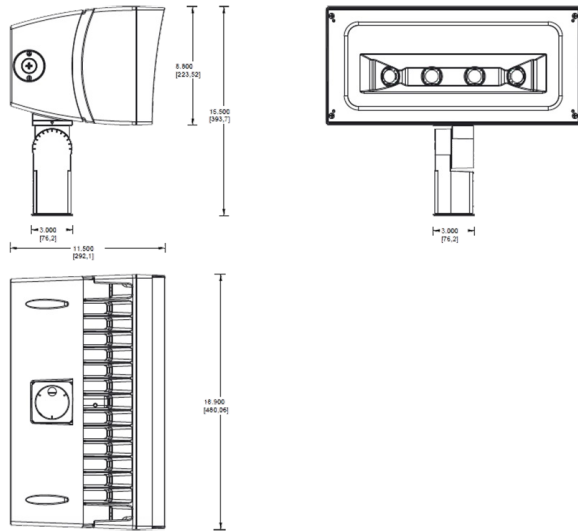

### Features

- Ultra efficient LED and optical design
- 100,000 hour life based on LM-80 tests
- Air-flow technology heatsink
- 5-year warranty

### Ordering Matrix

Family	Wattage	Mounting	Color Temp	Beam Option	Finish	Driver	Options
FFLED	180	SF	Y		W	/480/D10	/PCT4
	230 = 230W	SF = Slipfitter	Blank = 5000K (Cool)	Blank = 7H x 6V	Blank = Bronze	/D10 = 120-277V, 0-10V Dimming	Blank = No Option
	180 = 180W	T = Trunion	N = 4000K (Neutral)		W = White	/480/D10 = 480V w/ 0-10V Dimming	/7PR = 7 Pin Receptacle
			Y = 3000K (Warm)				/PCT = 3 Pin Twistlock Photocell 120-277V
							/PCT4 = 3 Pin Twistlock Photocell 480V
							/LC = Lightcloud® Controller
							/SP = 10KV Surge Suppressor