



3-inch new construction downlight with a patented 3-in-1 design that supports a variety of options for a broad range of applications.

Color: N/A

Weight: 10.4 lbs

| | |
|---------------------|--------------|
| Project: | Type: |
| Prepared By: | Date: |

| Driver Info | | LED Info | |
|--------------|------------------|-----------------|------------|
| Type: | Constant Current | Watts: | 15W |
| 120V: | 0.12A | Color Temp: | 3500K |
| 208V: | 0.08A | Color Accuracy: | 80 CRI |
| 240V: | 0.07A | L70 Lifespan: | 100,000 |
| 277V: | 0.06A | Lumens: | 523 - 1262 |
| Input Watts: | 15W | Efficacy: | 35 LPW |
| Efficiency: | N/A | | |

Technical Specifications

Listings

UL Listing:

Suitable for wet locations in a covered ceiling (adjustable models suitable for damp locations).

Optical

Photometrics:

Photometrics are based on prorated reports. Contact the RAB Lighting Design department for the most up-to-date data.

Optics:

High-efficiency TIR optics. Available as a downlight (80° or 50° beam), adjustable (40° or 20° beam with 40° vertical adjustment and 360° rotation), or a wall washer.

Construction

IC Rating:

Suitable for direct contact with insulation

Trim:

Accepts cones with trim

Housing Component:

This component must be ordered with New Construction Round Trim Module in order to make a complete fixture.

Cold Weather Starting:

Minimum starting temperature is -40° F (-40° C)

Maximum Ambient Temperature:

Suitable for use in 104° F (40°C) ambient temperatures

Housing:

Cold-rolled steel and aluminum

Installation:

Nailer bar and butterfly brackets included; C-channels optional for acoustic tiles

Green Technology:

Mercury and UV free. RoHS compliant components.

LED Characteristics

Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

Color Consistency:

2-step u'-v' Circle Tolerance, previously referred to as 2-step MacAdam Ellipse, achieves consistent fixture-to-fixture color (ANSI standard C78.377.2015)

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.12A, 208V: 0.08A, 240V: 0.07A, 277V: 0.06A

Dimming Driver:

Universal dimming driver supports TRIAC, ELV and 0-10V.

Surge Protection:

2kV

Performance:

80° white: 1112 lumens, 75 lm/W
 50° white: 1149 lumens, 78 lm/W
 40°A white: 1220 lumens, 82 lm/W
 20°A white: 1202 lumens, 81 lm/W
 WW white: 764 lumens, 52 lm/W

80° matte: 1118 lumens, 76 lm/W
 50° matte: 1158 lumens, 78 lm/W
 40°A matte: 1262 lumens, 85 lm/W
 20°A matte: 1243 lumens, 84 lm/W
 WW matte: 805 lumens, 54 lm/W

80° black: 859 lumens, 58 lm/W
 50° black: 1039 lumens, 70 lm/W
 40°A black: 1168 lumens, 79 lm/W
 20° black: 1169 lumens, 79 lm/W
 WW black: 523 lumens, 35 lm/W

Other

Aperture Size:

3" Rough-In


Special Order:

Available in battery backup option by special request. Contact RAB customer service to order.

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

Dimensions

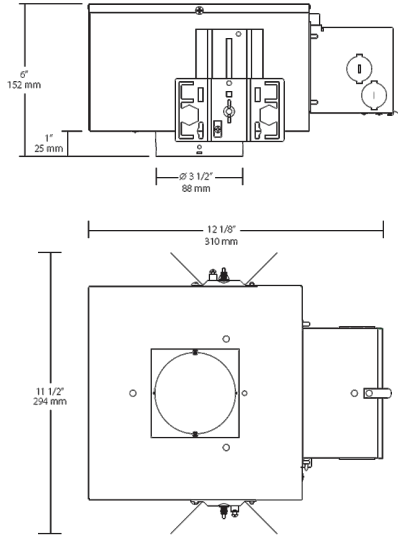

Features

- 3-in-1 housing accommodates downlight, adjustable or wall washer
- Universal driver supports TRIAC, ELV and 0-10 dimming
- IC-rated, Certified Air Tight
- 100,000 hour LED lifespan
- 5-year no-compromise warranty

Ordering Matrix

| Family | Size | Shape | Wattage | Driver | Color Temp | CRI | Trim | Installation |
|---------|--------|-----------|----------------------|---|---|-------------------------------|--|---|
| NDICLED | 3 | R | 15 | D | YN | | | |
| | 3 = 3" | R = Round | 25 = 25W 15 = 15W | D = TRIAC, ELV, 0-10V Dimming L = Lutron | N = 4000K (Neutral) YN = 3500K (Warm Neutral) Y = 3000K (Warm) YY = 2700K (Residential Warm) | Blank = 80 CRI HC = 90 CRI | Blank = Accepts cones with trim TL = Accepts trimless cones (spackle flange included) | Blank = Standard CP = Chicago Plenum |