0.9

N/A

<30%



Project:		Type:	
Prepared By:		Date:	
Driver Info	o 11W	LED Info Input Voltage:	120V

Power Factor:

Flicker:

THDi:

5000K (Daylight)

900

82 LPW

40,000


Technical Specifications		
Listings	Description	Warranty:
UL Listed:	Dimmable:	4 years
Yes	Yes	Optical
FCC:	Lamp Type:	Beam Angle:
Yes	Par	35°
T20:	Bulb Type:	Shipping Information
Complies with CEC Title 20	PAR30L	Case Dimensions:
T24:	Base Type:	12.4 x 8.27 x 7.09
Complies with Title 24 Appendix JA8	E26, Medium Screw Base	Pallet Quantity of Pieces:
Rohs:	Material:	600
Yes	Plastic	Pallet Dimensions:
ENERGY STAR V2.0:	LED Characteristics	45.47 x 37.2 x 35.43
This product is ENERGY STAR® Version 2.0 Certified	Lifespan:	Construction
CEC Status:	40,000-hour LED lifespan based on IES LM-70 results	MOL:
Lawful for sale in California	Other	4.53"
	Equivalent:	MOD:
	75W Halogen PAR30L	3.74"

Color Temp:

Color Accuracy: 90 CRI L70 Accuracy:

Lumens:

Efficacy:

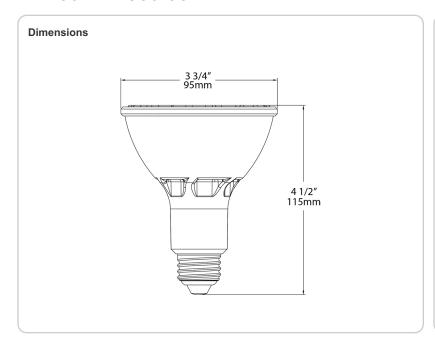

Features

Dimmable LED with a 40,000-hour lifespan: 90 CRI High-output models available $\,$

Produces rich and vibrant colors

Save up to 85% on energy

High output models available

Use in enclosed or open fixtures

Shatterproof