



High quality polycarbonate PL floodlight. Supplied with one, two or three 13 Watt twin tube compact fluorescent lamps. Adjustable swivel mounting arm with 1/2" thread. Lamps supplied.

Color: Bronze

Weight: 3.5 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

**Technical Specifications**

**Listings**

**UL Listing:**

Suitable for wet locations. (PLF 13 &26) For side wall mounting only.

**Construction**

**Housing and Lens:**

Corrosionproof and vandal resistant polycarbonate.

**Lens Gasket:**

High temperature tubular silicone.

**Reflector:**

Anodized aluminum.

**Minimum Temperature:**

0°F.

**Electrical**

**Sockets:**

GX23 base.

**Optical**

**Lamp:**

Three 13 watt compact fluorescent lamps supplied with fixture.

**LED Characteristics**

**Correlated Color Temp. (Nominal CCT):**

2700K.

**Other**

**Country of Origin:**

Designed by RAB in New Jersey and assembled in Taiwan.


**Trade Agreements Act Compliant:**

This product is a product of Taiwan and a "designated country" end product that complies with the Trade Agreements Act.

**GSA Schedule:**

Suitable in accordance with FAR Subpart 25.4.

**Dimensions**

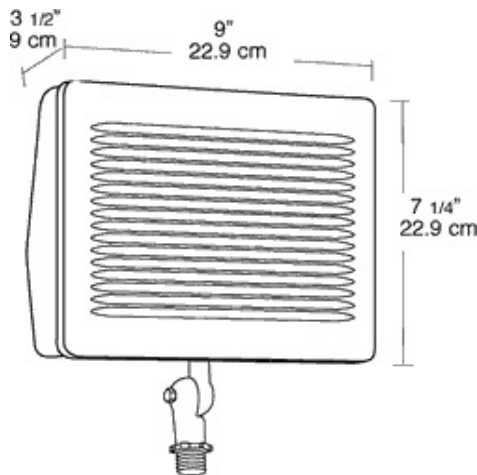

**Features**

- Corrosion and vandal resistant polycarbonate housing and lens
- Anodized aluminum reflector
- 0°F minimum operating temperature
- High temperature tubular silicone gasket on PLF39 model
- Heavy duty cast aluminum mounting arm and swivel with stainless steel screw
- 1/2" thread fits all standard covers