



<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type	Constant Current	Watts	10W
120V	90	Color Temp	5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	900
Input Watts	10W	Efficacy	90 lm/W

## Technical Specifications

### Other

**Product Type:**

Retrofit

**LEDs:**

LED array provides a uniform source with high efficiency and no pixilation

**Warranty:**

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

**Equivalency :**

Equivalent to 75W Incandescent

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

### Performance

**Lumens (Nominal):**

900

**Efficacy:**

90 lm/W

**Color Accuracy:**

90 CRI

**Color Temperature:**

5000K

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

### Electrical

**THD:**

≤20%

**Power Factor:**

≥0.9

**Dimmable:**

TRIAC and ELV (at 120V only).

**Input Voltage:**

120V

## Technical Specifications (continued)

### Electrical

**Operating Frequency:**

60Hz

**Operating Temperature:**

-30°C - 40°C

### Construction

**Size:**

6"

**Shape:**

Square

**Housing Material:**

Plastic

**Finish:**

White

**Trim Style:**

Baffle Trim

**Gaskets:**

Achieve restrictive airflow requirements without additional caulking

**Base Type:**

E26

**Mounting:**

Torsion springs are pre-installed and adjust to fit 5" or 6" compatible housing

### Compliance

**Safety Listing:**

UL Classified

**Environment:**

Wet

**Fixture Rating:**

Enclosed

**ENERGY STAR V2.2:**

This product is ENERGY STAR® Version 2.2 Certified.

**Energy Star ID:**

2366469

**T20 Compliant:**

Yes

**Lawful for Sale in California:**

Yes

**RoHS:**

Mercury and UV free. RoHS-compliant components.


**FCC:**

Complies with Part 15 of the FCC Rules

**Model Number:**

DLR0113(R6S10950120WB)

## Dimensions

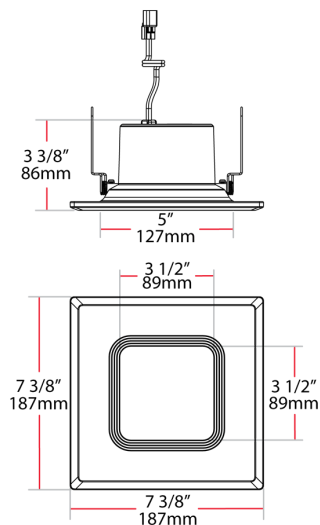

## Features

- High Performance LEDs up to 90 lm/w
- Use to replace up to 85W traditional light sources
- Robust plastic construction
- UL wet location rated
- Compatible with most standard recessed housings
- Dimmable down to 5% on compatible dimmers
- Available in Square 4" 650lm and 6" 950lm
- Available in 4 color temperatures: 2700K, 3000K, 3500K, 4000K & 5000K
- Available in a baffle trim option
- Color designer trims as optional accessories available
- 5-Year, No-Compromise Warranty