



The SUMO offers a sleek, low-profile design that adds a modern look to any space. They are easy to install with field adjustable color temperature, affordable, and a stylish options for new construction or retrofit. Mounting kit for recessed housing sold separately.

Color: White

Weight: 2.4 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.22A
208V	N/A
240V	N/A
277V	N/A
Input Watts	24W

LED Info

Watts	24W
Color Temp	5000K/4000K/3500K/3000K/2700K
Color Accuracy	90 CRI
L70 Lifespan	50,000 Hours
Lumens	1,800-1,950 lm
Efficacy	75-81 lm/W

Technical Specifications

Performance

Product Type:

Edge-lit Surface Mount

Lumens (Nominal):

5000K: 1,900lm

4000K: 1,950lm

3500K: 1,930lm

3000K: 1,880lm

2700K: 1,800lm

Efficacy:

5000K: 79 lm/W

4000K: 81 lm/W

3500K: 80 lm/W

3000K: 78 lm/W

2700K: 75 lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Wattage Equivalency:

Equivalent to 125W Incandescent

Electrical

Driver:

Constant Current, 50/60 Hz 120V, 120V: 0.22A

THD:

≤20%

Power Factor:

≥0.9

Input Wattage:

24W

Dimmable:

Yes, TRIAC/ELV dims down to 10%.

[See Dimmer Compatibility List.](#)

Input Voltage:

120V

Operating Frequency:

50/60Hz

Operating Temperature:

-4°F - 104°F (-20°C - 40°C)

Surge Protection:

2.5kV

Technical Specifications (continued)

LED Characteristics

Color Temperature:

Field Adjustable: 5000K/4000K/3500K/3000K/2700K

Color Accuracy (CRI):

>90 CRI

R9 Value:

High color performance with R9 greater than or equal to 50

Color Consistency:

4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Installation

Mounting:

Surface Mount

Construction

Finish:

Formulated for high durability and long-lasting color

Housing Material:

Metal

Trim Style:

Smooth

Lens:

Frosted lens constructed from polycarbonate material diffuses light evenly and smoothly

Compliance

Safety Listing:

UL Listed

Environment:

Suitable for use in indoor and outdoor application in dry, damp, and wet environments

UV Protection:

Fade-resistant powder spray polyester

Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified

California Energy Commission (CEC) Status:

Lawful for Sales in California

NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Other

Compatible Products:

[DRI-25-EMGR-DC](#)

[25W Emergency Driver](#)

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act


Note:

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

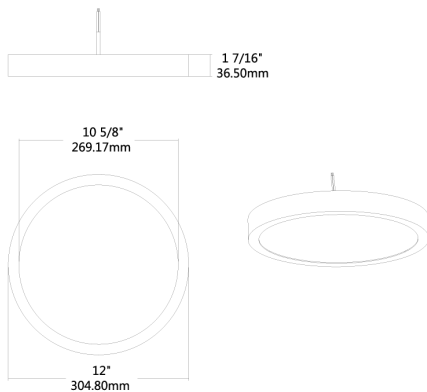

Features

Select from 5 field-adjustable color temperatures 5000K, 4000K, 3500K, 3000K, or 2700K

Suitable for indoor/outdoor applications in dry, damp, or wet environments

TRIAC/ELV dims down to 10%. See Dimmer Compatibility List.

Meets California Title 24 requirements

50,000-Hour LED lifespan

5-Year, No-Compromise Warranty

120V