

product

Compact ceiling mount fixture: 7, 9, 13, or 14 Watt fluorescent. Reflector is die-formed heavy gauge steel in white finish with clear vandalproof polycarbonate refractor. Lamp supplied.

Color: N/A

Weight: 2.6 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 7W Twin
 Watts: 7W
 Shape/Size: N/A
 Base: N/A
 ANSI: N/A
 Hours: 10,000
 Lamp Lumens: 400
 Efficacy: 44 LPW

Ballast Info

Type: NPF 120V
 Watts: 0.17A
 Voltage: 208V: N/A
 240V: N/A
 277V: N/A
 Input Watts: 9W
 Efficiency: 78%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic.

Photocell:

Button Photocell requires mounting back box. Product number VAN1BB.

Optical

Refractor:

Injection molded polycarbonate, designed for maximum structural strength.

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver .

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel.

Lens:

White.

Ballast Minimum Starting Temperature:

0°F.

Other

Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

Trade Agreements Act Compliant:


This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

VAN1F7W

Dimensions

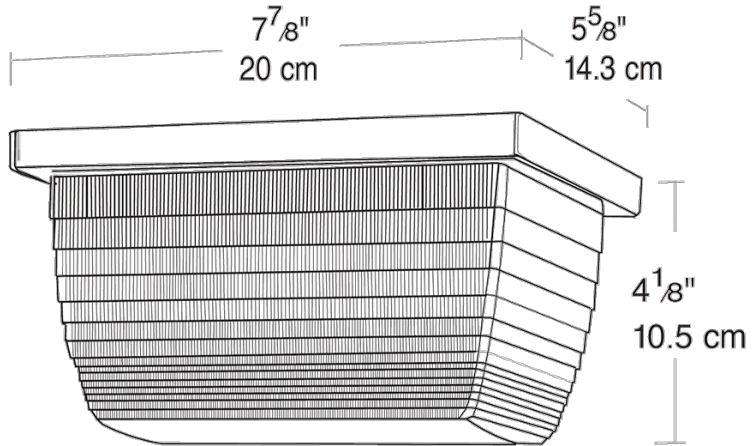

Features

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractors

Back boxes available for conduit entry