



Entry light in 50 Watt HPS. Cast aluminum housing with unbreakable white polycarbonate globe. Bracket fixture mounts to common junction boxes. Photocell models available. Minimum operating temperature 14°F. HPS lamps supplied.

Color: White

Weight: 3.2 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Lamp Info		Ballast Info	
Type:	ED17	Type:	R-NPF 120V
Watts:	50W	120V:	1.5/1.2A
Shape/Size:	N/A	208V:	N/A
Base:	N/A	240V:	N/A
ANSI:	N/A	277V:	N/A
Hours:	24,000	Input Watts:	62W
Lamp Lumens:	4,000	Efficiency:	81%
Efficacy:	65 LPW		

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598.

### Construction

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

### Housing:

Die cast aluminum.

### Globes:


White glass or unbreakable polycarbonate white globes.

### Electrical

#### Socket:

HID Glazed porcelain 4kv pulse rated with nickel plated screw shell and spring contacts. CFL White thermo plastic with integral clips for lamp retention.

## Dimensions

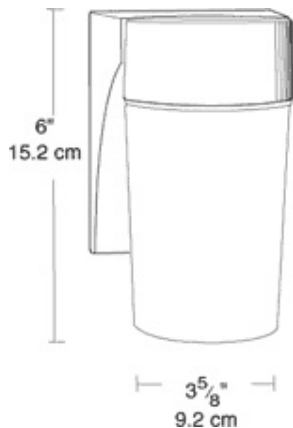

## Features

- Die cast aluminum for superior durability
- Decorative white heat resistant glass or polycarbonate globes available
- High temperature silicone internal gaskets
- Premium porcelain socket
- UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations