



LED Wallpacks for solar applications or other 10-30 VDC systems. Perfect for off-grid, remote-area lighting. Up to 85% more efficient than line voltage AC solutions. Available in 10, 13, 20 and 26 Watt.

Color: White

Weight: 3.3 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type:	DC to DC
120V:	N/A
208V:	N/A
240V:	N/A
277V:	N/A
Input Watts:	15W
Efficiency:	85%

### LED Info

Watts:	13W
Color Temp:	5000K
Color Accuracy:	66 CRI
L70 Lifespan:	100000
Lumens:	997
Efficacy:	65 LPW

## Technical Specifications

### LED Characteristics

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

#### Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2015.

#### LEDs:

Multi-chip 13 watt, high-output, long-life LEDs.

#### Color Accuracy:

66 CRI

#### Color Temperature:

5000K

### Electrical

#### Electrical Input Specifications:

Max Watts = 10W; Input Volts = 10-30 VDC; Operating Amps = 1.3 - 0.4A.

#### Electrical Input Specifications:

Max Watts = 15W; Input Volts = 10-30 VDC; Operating Amps = 1.5 - 0.5A.

### Construction

#### Cold Weather Starting:

The minimum starting temperature is -30°C (-22° F).

#### Thermal Management:

Die-cast aluminum Thermal Management system for optimal heat dissipation.

#### Housing:

Die-cast aluminum housing, lens frame and mounting arm.

#### Mounting:

Junction box.

#### Reflector:

Specular aluminum.

#### Gaskets:

High-temperature silicone gaskets.

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

#### Mounting:

Junction box and Surface Plate.

### Listings

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80, and have received the Department of Energy "Lighting Facts" label.

#### Dark Sky Approved:

The International Dark Sky Association has approved these products as full cutoff, fully shielded luminaires.

### Other

#### California Title 24:

LPACK complies with California Title 24 building and electrical codes.

#### For Use on LEED Buildings:

IDA Dark Sky Approval means that these fixtures can be used to achieve LEED Credits for Light Pollution Reduction.

#### Patents:

The design of the LPACK is protected by US patents pending in US., Canada, China, Taiwan & Mexico.

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).

## Technical Specifications (continued)

### Other

#### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

#### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

#### Starting Amps / Operating Amps:

12V DC/3.5A, 24V DC/3.5A.

### HID Replacement Range:

The WPLED13 can be used to replace 70-150W Metal Halide Wallpacks based on delivered lumens.

### Equivalency:

The WPLED13 is Equivalent in delivered lumens to a 100W Metal Halide Wallpack.

### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

### Optical

#### Fixture Efficacy:

71 Lumens per Watt


#### BUG Rating:

B1 U0 G0

#### BUG Rating:

B1 U0 G0

## Dimensions

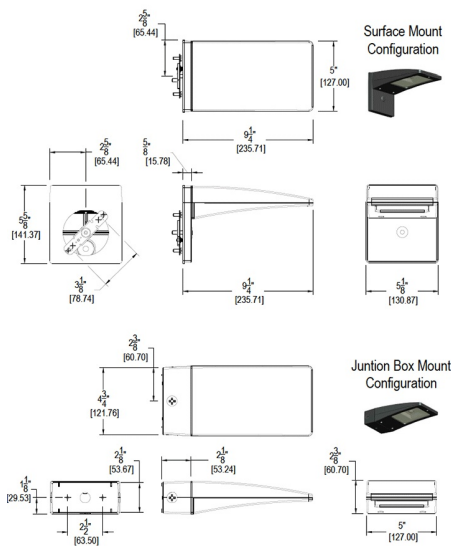

## Features

- Low voltage DC
- Ideal for solar applications
- Up to 85% more energy efficient
- No energy-loss from DC-AC inverter
- Enables off-grid, remote-area lighting
- 5-year warranty

## Ordering Matrix

Family	Watts	Direct Current	Finish
WPLED	10 = 10W	DC = Direct Current	Blank = Bronze W = White
	13 = 13W		