



Ultra-high efficiency 20 Watt wallpack. Patent Pending thermal management system. 100,000 hour L70 lifespan. 5 Year Warranty.

Color: White

Weight: 6.1 lbs

<b>Project:</b>	<b>Type:</b>
<b>Prepared By:</b>	<b>Date:</b>

Driver Info		LED Info	
Type:	Constant Current	Watts:	20W
120V:	0.19A	Color Temp:	5000K
208V:	N/A	Color Accuracy:	70 CRI
240V:	N/A	L70 Lifespan:	100000
277V:	N/A	Lumens:	1,401
Input Watts:	22W	Efficacy:	65 LPW
Efficiency:	93%		

## Technical Specifications

### Electrical

#### Photocell:

120V Button Photocell Included. \_\_\_ Photocell is only compatible with 120V.

#### THD:

7.35% at 120V

#### Driver:

Automatic Voltage Sensing Driver for 120-277 volts.

#### Driver:

Two Multi-chip 10W high output long life LED Driver Constant Current, Class 2

#### Surge Protection:

4kV

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

#### Dark Sky Approved:

The International Dark Sky Association has approved this product as a full cutoff, fully shielded luminaire.

#### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

### LED Characteristics

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations.

#### Color Consistency:

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

#### Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2011.

#### Color Accuracy:

70 CRI

#### Color Temperature (Nominal CCT):

5000K (Daylight).

### Construction

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contains no VOC or toxic heavy metals.

#### Cold Weather Starting:

The minimum starting temperature is -40°C/-40°F

#### Maximum Ambient Temperature:

Suitable for use in 55°C (131°F) ambient temperatures.

#### Thermal Management:

Integral cast aluminum mounting pad and external fins for optimal heat sinking to ensure cool operation with maximum LED life and light output.

#### Housing:

Precision die cast aluminum housing, lens frame and mounting plate.

#### Two Mounting Options:

Junction Box with 5 Conduit Entry Points and Threaded Plugs for surface mounting plus Cover Plate for mounting over 4" recessed junction box included with WPLED20.

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

#### For use on LEED Buildings:

IDA Dark Sky Approval means that this fixture can be used to achieve LEED Credits for Light Pollution Reduction.

#### Gaskets:

High Temperature Silicone.

### Optical

#### Fixture Efficacy:

65 Lumens per Watt

### Other

#### Patents:

The WPLED20 design is protected under patents pending in the U.S., Canada, China, Taiwan and Mexico.

#### Patents:

The LPACK design is protected under patents in the U.S. Pat. D634873, Canada Pat. 133207, China Pat. ZL201030129137, Taiwan Pat. D139540 and Mexico Pat. 32491

## Technical Specifications (continued)

### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

#### Equivalency:

The WPLED20 is Equivalent in delivered lumens to a 150W Metal Halide Wallpack.

#### HID Replacement Range:

The WPLED20 can be used to replace 100-175W Metal Halide Wallpacks based on delivered lumens.

#### Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

#### Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

#### Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


#### Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

#### GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

## Dimensions

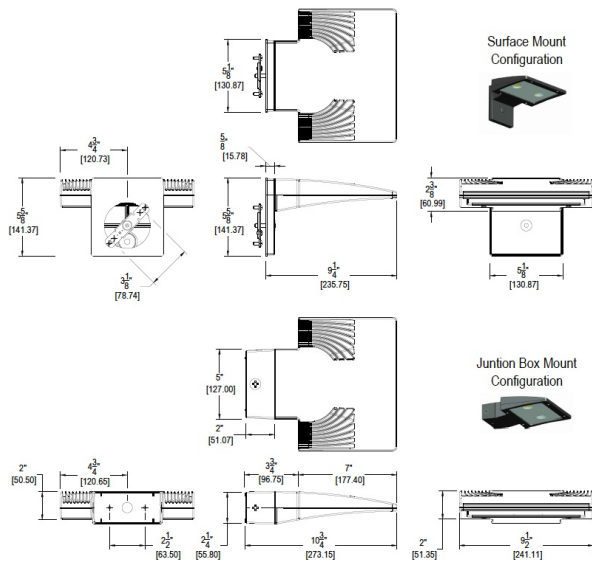

## Features

- Ultra-high efficiency 20 Watt wallpack
- Maintains 70% of initial lumens at 100,000 hours
- Weatherproof high temperature silicone gaskets
- Superior heat sinking with die cast aluminum housing and external fins
- Replaces 100W MH
- 100 up to 277 Volts
- 5-year warranty

## Ordering Matrix

Family	Watts	Color Temp	Sensor	Finish	Photocell
WPLED	20 = 20W	Blank = 5000K (Cool) Y = 3000K (Warm) N = 4000K (Neutral)	Blank = No Sensor MS = Mini Sensor	Blank = Bronze W = White	Blank = No Photocell /PC = 120V Button /PCS = 120V Swivel /PC2 = 277V Button