



SWP Series LED Fixture

Slim Wall Pack LED Light Fixture

Ushio America's SWP series slim, low-profile LED wall pack has a contemporary design and is engineered using a high quality die-cast aluminum housing and premium LEDs which delivers bright, crisp light.

Installation is made simple and easy with a hinged junction box. Optional ½" knuckle mount or adjustable swivel bracket will provide you the flexibility for your application.

The SWP series is ideal for low level pathway lighting as well as landscape and wall/surface applications. These fixtures are popular for commercial applications, apartment buildings, schools and multi-use facilities.

All SWP series fixtures operate on universal voltage (100-277V) with popular color temperatures (5000K and 4000K). Available in 15W, 29W and 50W, these LED fixtures come with Ushio's premium 5-year limited warranty.




FEATURES & BENEFITS

- Energy Saving
- DLC Qualified
- IP65 Outdoor Rated
- Operating Temperature: -4° F to 120° F
- Photocell / Sensor Compatible
- Long Life: 50,000 Hours
- 5-Year Limited Warranty

APPLICATIONS

- Perimeter Lighting
- Pathway Lighting
- Entryway Lighting
- Security Lighting

SPECIFICATIONS

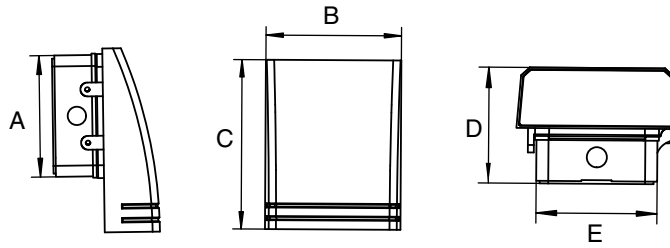

A	B	C	D	E
5.25 in	6.30 in	7.87 in	4.00 in*	4.75

* Applies to ADA (Americans with Disabilities Act) Standard

Watts (W)	Ordering Code	Description	Color Temp (K)	Lumens (lm)	Beam Angle	CRI	Rated Life (h)	Finish
15	1004653	● ● ● 15SWP/40K/BK	4000	1,740	110°	70	50,000	Black
15	1004654	● ● ● 15SWP/50K/BK	5000	1,797	110°	70	50,000	Black
29	1004655	● ● ● 29SWP/40K/DB	4000	3,268	110°	70	50,000	Dark Bronze
29	1004656	● ● ● 29SWP/50K/BK	5000	3,330	110°	70	50,000	Black
50	1004657	● ● 50SWP/40K/BK	4000	5,509	110°	70	50,000	Black
50	1004658	● ● 50SWP/50K/BK	5000	5,856	110°	70	50,000	Black


● IP65 ● DLC ● Title 24

Accessories (Sold Separately)

- 1004733 = MT-SB-SWP/BK (Swivel Bracket for SWP - Black).
- 1004734 = MT-SF-SWP/BK (Slip Fitter Mount for SWP - Black).
- 1004735 = MT-KNC-SWP/BK (3/4" NPT Knuckle Mount for SWP - Black).
- 1004707 = SEN-PHO-BT-MT/MV (Button Photocell 120-277V).




SEN-PHO-BT-MT/MV
Button Photocell 120-277V

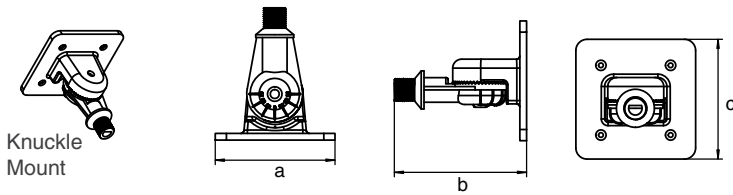


Knuckle
Mount

A	B	C
4.21 in	4.65 in	4.21 in

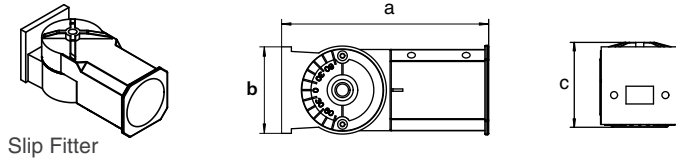

Slip Fitter


A	B	C
7.04 in	2.95 in	3.25 in

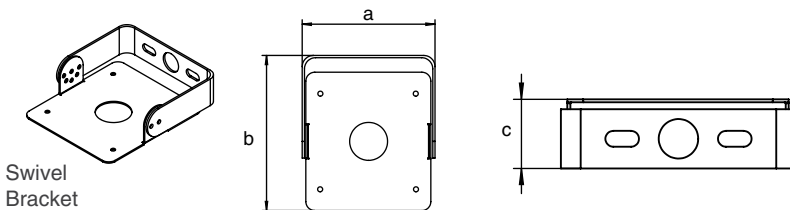

Swivel
Bracket

A	B	C
4.68 in	5.47 in	1.37 in

PHOTOMETRICS CHART

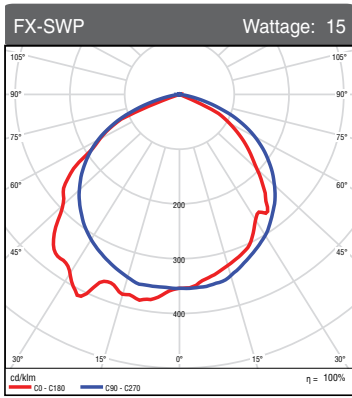


Zonal Lumen Summary

Zone	Lumens	Luminaire
0-30	499.51	28.70%
0-40	833.73	47.90%
0-60	1488.04	85.50%
60-80	247.67	14.20%
70-80	50.72	2.90%
90-120	0.41	0.00%
90-180	1.70	0.10%
0-180	1740.13	100.00%

Distance	Illuminance at a Distance	
	Center Beam fc	Beam Width
5.0ft	24.6 fc	12.4 ft
10.0ft	6.16 fc	24.8 ft
15.0ft	2.74 fc	37.2 ft
20.0ft	1.54 fc	49.6 ft
25.0ft	0.99 fc	61.9 ft
30.0ft	0.68 fc	74.3 ft

■ Vert. Spread: 102.2°
■ Horiz. Spread: 107.8°

Total Luminaire Efficiency = 100.00%

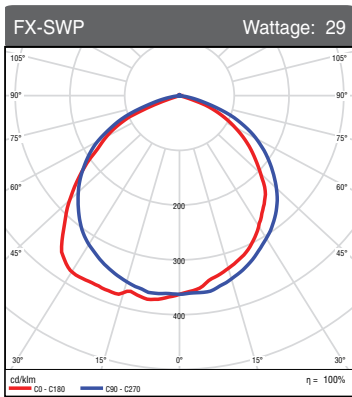


Zonal Lumen Summary

Zone	Lumens	Luminaire
0-30	944.93	28.90%
0-40	1570.71	48.00%
0-60	2780.44	85.00%
60-80	480.97	14.70%
70-80	107.59	3.30%
90-120	0.85	0.00%
90-180	3.31	0.10%
0-180	3270.7	100.00%

Distance	Illuminance at a Distance	
	Center Beam fc	Beam Width
5.0ft	47.5 fc	12.9 ft
10.0ft	11.9 fc	25.8 ft
15.0ft	5.27 fc	38.7 ft
20.0ft	2.97 fc	51.5 ft
25.0ft	1.90 fc	64.4 ft
30.0ft	1.32 fc	77.3 ft

■ Vert. Spread: 104.4°
■ Horiz. Spread: 113.6°

Total Luminaire Efficiency = 100.00%

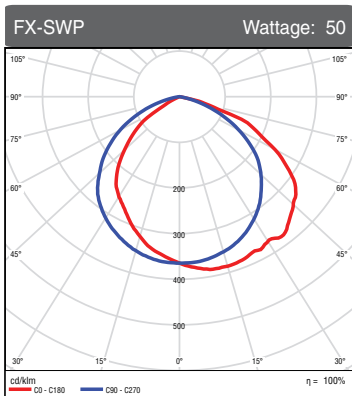

Zonal Lumen Summary

Zone	Lumens	Luminaire
0-30	1583.76	28.70%
0-40	2620.58	47.60%
0-60	4672.85	84.80%
60-80	825.93	15.00%
70-80	212.02	3.80%
90-120	0.02	0.00%
90-180	0.03	0.00%
0-180	5510.81	100.00%

Distance	Illuminance at a Distance	
	Center Beam fc	Beam Width
5.0ft	80.4 fc	13.7 ft
10.0ft	20.1 fc	27.3 ft
15.0ft	8.93 fc	41.0 ft
20.0ft	5.02 fc	54.6 ft
25.0ft	3.22 fc	68.3 ft
30.0ft	2.23 fc	81.9 ft

■ Vert. Spread: 107.6°
■ Horiz. Spread: 110.9°

Total Luminaire Efficiency = 100.00%