



LED bollard with architectural quality and strength at an affordable price point. Cylindrical post with dome head. Available in 4 light pattern configurations including 360° (24W), 270°(18W), 180°(12W option) & 90°(12W standard).

Color: White

Weight: 23.0 lbs

**Project:**

**Type:**

**Prepared By:**

**Date:**

### Driver Info

Type: Constant Current  
 120V: 0.26A  
 208V: 0.18A  
 240V: 0.15A  
 277V: 0.14A  
 Input Watts: 23W  
 Efficiency: N/A

### LED Info

Watts: 24W  
 Color Temp: 4000K  
 Color Accuracy: 72 CRI  
 L70 Lifespan: 100000  
 Lumens: 2577  
 Efficacy: 111 LPW

## Technical Specifications

### Listings

#### UL Listing:

Suitable for wet locations. Suitable for mounting within 4 ft. (1.2m) of the ground.

#### DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities.  
 DLC Product Code: P65W0M37

#### IESNA LM-79 & IESNA LM-80 Testing:

RAB LED fixtures have been tested by an independent laboratory in accordance with IESNA LM-79 and 80, and have received the Department of Energy "Lighting Facts" label.

### LED Characteristics

#### LEDs:

Long-life, high-efficiency, surface mount LEDs.

#### Lifespan:

100,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Color Consistency:

5-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color.

#### Color Stability:

LED color temperature is warranted to shift no more than 200K in CCT over a 5 year period.

#### Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017

### Electrical

#### Driver:

Constant Current, Class 2, 100-277V, 50/60 Hz, 4kV Surge Protection, 720mA, 120V: 0.26A, 208V: 0.18A, 240V: 0.15A, 277V: 0.14A

#### THD:

12.2% at 120V, 12.3% at 277V

#### Power Factor:

98.7% at 120V, 91.7% at 277V

### Construction

#### Cold Start BDLEDR24with Battery Backup:

Minimum starting temperature is -20°C/-4°F

#### Cold Weather Starting:

Minimum starting temperature is -40°C (-40°F)

#### Thermal Management:

Cast aluminum Thermal Management system for optimal heat sinking. The BDLED is designed for cool operation, maximum efficiency and long life by minimizing LED junction temperature.

#### Housing:

Die-cast aluminum with extruded aluminum post

#### Lens:

Frosted vandal resistant polycarbonate

#### Reflector:

Vacuum metalized polycarbonate

#### Mounting:

Four (4) anchor bolts provided for concrete pad mounting. Internal base support has leveling screws.

#### Gaskets:

High-temperature silicone gaskets seal out moisture gaskets seal out moisture

#### Anchor Bolt:

Anchor Bolt Dimension is available .

#### Finish:

Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color.

#### Green Technology:

Mercury and UV free. RoHS compliant components. Polyester powder coat finish formulated without the use of VOC or toxic heavy metals.

### Battery Backup

#### Backup Battery:

Two field-replaceable, high-temperature, maintenance-free, nickel-cadmium batteries.

### Optical

#### BUG Rating:

B2 U3 G2

### Other

#### California Title:

BDLEDR24 can be used to comply with 2016 Title 24 Part 6 when used with a remote mounted photosensor control. Select PCS900 (120V) or PCS1900/277 (277V) to order a photosensor accessory.

#### Patents:

The design of BLED is protected by patents in US, Canada & China.

## Technical Specifications (continued)

### Other

#### Replacement:

Replaces up to 50W Metal Halide.


### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish.

### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

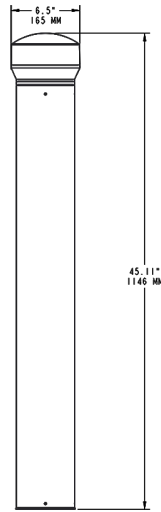

## Features

- Patented base mount design for super sturdy installation
- Durable construction and frosted vandal-resistant polycarbonate lens
- Precision-engineered optics deliver maximum downward lighting without glare
- Four leveling screws provided for easy installation
- 100,000-hour LED lifespan

## Ordering Matrix

Family	Wattage	Color Temp	Finish	Distribution	Voltage	Dimming	Backup
BDLEDR	24	N	W				/EC
	24 = 24W 360° Pattern	Blank = 5000K (Cool)	Blank = Bronze	Blank = Standard	Blank = No Option (120-277V)	Blank = None (Standard)	Blank = No Battery Backup
	18 = 18W 270° Pattern	N = 4000K (Neutral)	W = White	180 = 180 degrees (12W only)	/480 = 480V (24W only)	/D10 = 0-10V Dimming	/E = Battery Backup (24W only)
	12 = 12W	Y = 3000K (Warm)					/EC = Battery Backup Cold Weather (24W only)