

product

Die cast aluminum construction. Mounts to existing surface or recessed 4" boxes. Adapter plate provided. Medium base socket and a variety of globes. Lamp supplied.

Color: White

Weight: 2.5 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 13W Quad
 Watts: 13W
 Shape/Size: N/A
 Base: N/A
 ANSI: N/A
 Hours: 10,000
 Lamp Lumens: 825
 Efficacy: 49 LPW

Ballast Info

Type: NPF 120V
 120V: 0.35A
 208V: N/A
 240V: N/A
 277V: N/A
 Input Watts: 17W
 Efficiency: 76%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

Construction

Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permoglobes available in clear and in color.

Die Cast Guard:

Supplied with one piece white die cast guard with set screw.

Ballast Minimum Starting Temperature:

32°F.

Optical

F13:

Compact Fluorescent 13W.

Other

Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

Dimensions

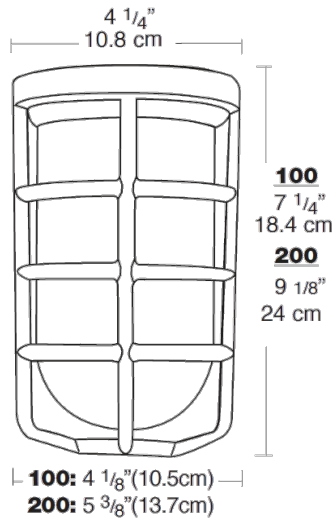

Features

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads

Clear heat resistant glass globes standard Polycarbonate Permoglobes sold separately