



Box mount, die cast aluminum with built-in junction box and sturdy mounting lugs. Medium base socket, 1/2" or 3/4" NPS hub size and a variety of globes. incandescent lamp A21 for 100 Series, PS25 for 200 Series. Lamp not supplied.

Color: Natural

Weight: 3.0 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: A19
 Watts: 150W
 Shape/Size: N/A
 Base: N/A
 ANSI: N/A
 Hours: N/A
 Lamp Lumens: N/A
 Efficacy: N/A

Ballast Info

Type: N/A
 120V: N/A
 208V: N/A
 240V: N/A
 277V: N/A
 Input Watts: 0W

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for use in dwellings. Suitable for use with 90°C supply wiring. Complies with UL Standard 1598. For non-hazardous locations where the lamp, socket and wiring require protection from rain, corrosive fumes, non-combustible dusts, moisture, non-explosive vapors and gases. For lamp base up installation only when outdoors.

Construction

Globes:

Supplied with clear thermal shock resistant soda lime glass unless otherwise stated. Colored and white glass globes available. Unbreakable Permoglobes available in clear and in color.

Die Cast Guard:

Supplied with one piece die cast guard with set screw.

Hub Size:

3/4" Tapped.

Electrical

Maximum Watts:

150 watts

Colored Globe Maximum Watts:

100 watts

Other

Country of Origin:

Designed by RAB in New Jersey and assembled in Taiwan.


Trade Agreements Act Compliant:

This product is a product of Taiwan and a "designated country" end product that complies with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

Dimensions

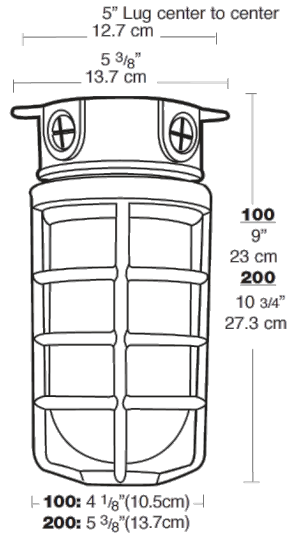

Features

All stainless steel hardware

Close-up plugs allow Phillips or slotted screwdrivers for easy installation

Junction box with sturdy mounting lugs

UL Listed for use with 90°C supply wiring OK for use in dwellings and wet locations

High temperature silicone internal gaskets

Premium porcelain socket with 150C 8" long leads

Clear heat resistant glass globes standard Polycarbonate Permoglobes available